


## 34 LT STEEL CYLINDER

The 34LT steel cylinder is used for the supply of non-reactive calibration gas mixtures. The CGA 600 valve is compatible with this cylinder. The cylinder is small, lightweight and easily carried on site or to where it is needed. It is trusted for high performance, dependability, quality and FAST shipping

| Characteristic |               |
|----------------|---------------|
| Gas Type       | Non-Reactive  |
| Contents       | 34 liters     |
| Pressure       | 500 psi       |
| Dimensions     | 10.75" x 2.9" |
| Weight         | 1 lb 8 oz     |
| Material       | Steel         |

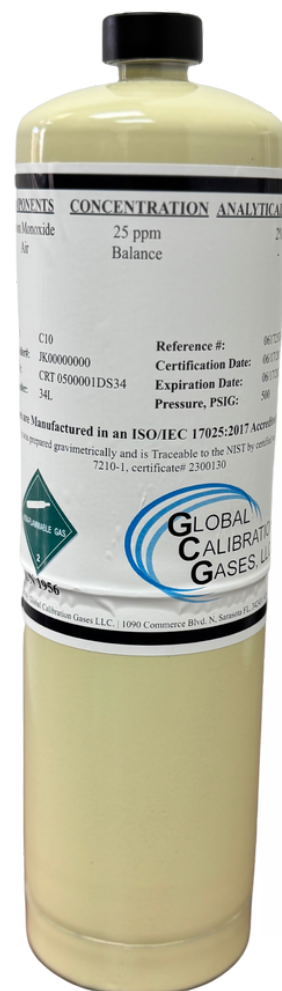

| Specifications |                |             |
|----------------|----------------|-------------|
| Approvals      | Fill Type      | Valve Inlet |
| Global         | Non-Refillable | CGA 600     |